


S-Type Non Current Carrying Spacer Clamp For Stranded Conductor

Type No.	Catalogue No.	Conductor Ⓜ	Centre Spacing D	A	Unit Weight
S-1	C23013	2X26.5	150	62	1.10kg
S-2	C23023	2X38.3	150	55	1.20kg
S-3	C23033	2X26.5	330	62	2.20kg
S-4	C23043	2X38.3	330	55	2.40kg
S-5	C23053	3X38.3	165	62	2.20kg
S-6	C23113	2X36.0	200	62	1.60kg
S-7	C23123	2X26.5	380	62	2.20kg

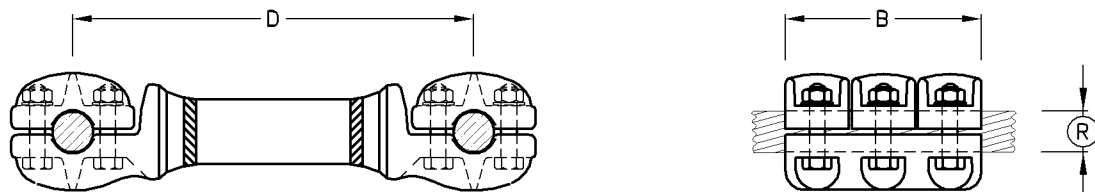

S-Type Current Carrying Spacer Clamp For Stranded Conductor

Type No.	Catalogue No.	Conductor Ⓜ	B	Centre Spacing D	Max. Rating Amps	Unit Weight
S-10	C23063	2X26.5	124	150	1600	3.50kg
S-11	C23073	2X38.3	175	150	2500	5.00kg
S-12	C23083	2X26.5	124	330	1600	4.00kg
S-13	C23093	2X38.3	175	330	2500	5.50kg
S-14	C23103	3X38.3	175	165	2500	9.00kg

- Note:**
- 1) Conductor contact surface areas are serrated.
 - 2) Other conductor sizes and centre spacing are available on request.
 - 3) Material: Cast Aluminium
: Bolts & Nuts-Steel HT.8.8 H.D.G.
 - 4) Voltage: 500kV Max.