


Full Tension Compression Joint For Steel Earth Wire Conductors

Dia.	Stranding Numbers & Dia.	Catalogue No.	A	A/F	Alcan Die	UTS Cond.	Unit Weight
						kN	
6.36	7/2.12mm	L330612	180	10.1	DS7	32.47	0.16kg
7.00	7/2.33mm	L330622	180	12.7	DS8	40.71	0.28kg
7.92	7/2.64mm	L330122	180	12.7	DS8	52.39	0.42kg
8.75	3/4mm	L330112	240	15.2	DS9	52.23	0.42kg
8.84	7/2.95mm	L330632	240	15.2	DS9	66.70	0.42kg
9.00	7/3.00mm	L330502	240	16.1	DS10	67.70	0.42kg
9.75	7/3.25mm	L330202	240	16.1	DS10	79.46	0.44kg
10.0	19/2.0mm	L330642	240	16.1	DS10	80.80	0.50kg
10.05	7/3.35mm	L330102	240	16.1	DS10	79.04	0.45kg
11.0	19/2.2mm	L330652	240	16.1	DS10	97.77	0.54kg
12.0	7/4.0mm	L330002	260	20.2	DS12	124.0	0.64kg
12.0	19/2.4mm	L330092	260	20.2	DS12	116.3	0.64kg

Note: 1) Other conductor sizes are available on request.
2) Material: D.F.Steel H.D.G.

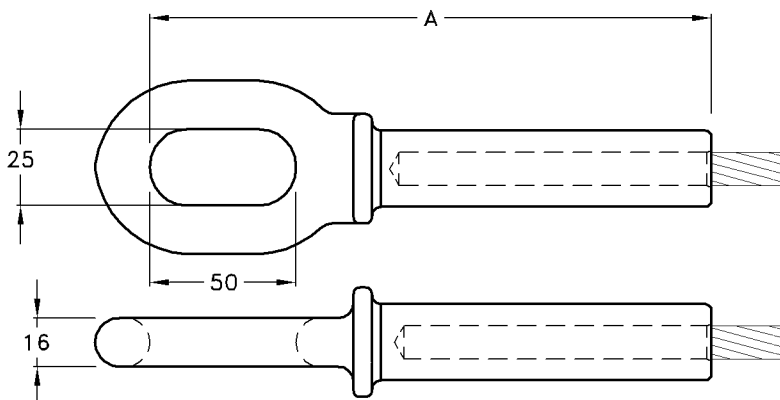

Compression Dead Ends For Steel Earth Wire

Dia.	Stranding Numbers & Dia.	Catalogue No.	A	A/F	Alcan Die	UTS Cond.	Unit Weight
						kN	
6.09	7/2.03mm	L340052	180	12.7	DS8	30.90	1.16kg
7.92	7/2.64mm	L340072	195	12.7	DS8	52.39	1.28kg
12.0	7/4.0mm	L340062	214	20.2	DS12	124.0	1.42kg
12.00	19/2.4mm	L340092	214	20.2	DS12	140.7	1.43kg
13.25	19/2.65mm	L340082	214	20.2	DS12	140.7	1.43kg

Note: 1) Other conductor sizes are available on request.
2) Material: D.F.Steel H.D.G.